

# Excellent value for harvesters and heavy equipment



## MICHELIN MEGAXBIB



### Sizes

1000/50 R25 TL 172A8/166D R1  
620/75 R26 TL 166A8/166B  
750/50 R26 TL 157A8/151D  
750/65 R26 TL 166A8/166B  
620/75 R30 TL 168A8/168B  
650/75 R32 TL 172A8/172B

800/65 R32 TL 167A8/167B  
800/65 R32 TL 172A8/172B  
800/70 R32 TL 181A8/181B  
900/60 R32 TL 176A8/176B  
1050/50 R32 TL 178A8/172D T2  
1050/50 R32 TL 178A8 M28

NEW

1050/50 R32 TL 184A8 T2  
620/75 R34 TL 170A8/170B  
710/75 R34 TL 178A8/178B  
620/70 R38 TL 170A8/170B

### Sizes for dual fitment use only

520/85 R42 TL 162A8/162B  
620/70 R42 TL 166A8/166B

NEW

NEW


### Ability to withstand heavy loads

- Excellent casing endurance


### Months of work harvested in a few days...

- A tyre construction which meets the demands of reliability, load and comfort

Conventional construction

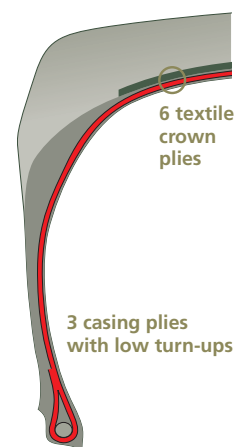


MICHELIN MEGAXBIB: an innovative construction

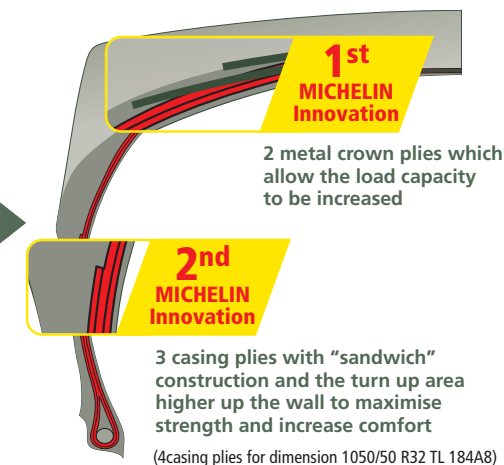

### Product recognised by all the major harvester manufacturers

### Reliability tried and tested by farmers

# Characteristics of MICHELIN tyres for harvesting machinery MICHELIN MEGAXBIB

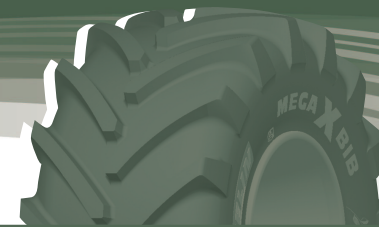

Ø  inches	Description	CAI	Tyre characteristics				Rim widths <sup>(1)</sup>  inches	Tube <sup>(2)</sup>	75% internal volume  litres		Pressure (bar) and (psi) – Load per tyre in kg <sup>(3)</sup>																
			S mm	D mm	R' mm	R.C. mm					Bar Psi	1.00 15	1.20 17	1.40 20	1.60 23	1.90 28	2.20 32	2.40 35	2.60 38	2.70 39	2.80 41	3.00 44	3.20 46	3.40 49	3.60 52	3.80 55	
25	1000/50 R25 172A8/166D TL MEGAXBIB R1	585115	1026	1657	726	4895	36.0 TH		1044		10 km/h Cyc 30 km/h Cyc. 10 km/h 30 km/h 40 km/h 65 km/h	5 815 4 145 3 875 3 230	6 525 4 655 4 350 3 655	6 590 5 815 7 240 5 160 4 825 4 075	7 440 6 560 8 740 5 670 5 300 4 500	8 620 7 600 8 740 6 230 5 825 4 875	9 605 8 475 9 225 6 580 6 150 5 300	10 200 9 000 9 225	10 455 9 225	10 580 9 340	10 710 9 450						
26	620/75 R26 166A8/166B TL MEGAXBIB (23,1 R26)	614320	588	1602	712	4748	DW20B (A) DW18L	830	516		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	4 410 3 910 3 170 3 060 2 860 2 860	4 685 4 240 3 465 3 340 3 120 3 120	4 955 4 570 3 755 3 620 3 380 3 380	5 230 4 900 4 050 3 900 3 640 3 640	5 745 5 315 4 395 4 230 3 950 3 950	6 260 5 730 4 735 4 565 4 260 4 260	6 605 6 010 4 965 5 005 4 470 4 470	6 950 6 285 5 195 5 115 4 680 4 680	7 120 6 425 5 310 5 230 4 780 4 780	7 290 6 565 5 420 5 230 4 885 4 885	7 635 6 840 5 650 5 450 5 090 5 090	7 980 7 120 5 880 5 670 5 300 5 300	8 325 7 395	8 665 7 675	9 010 7 950	
	750/50 R26 157A8/151D TL MEGAXBIB	711180	759	1404	625	4163	DW25B (A)		459		10 km/h Cyc 30 km/h Cyc. 10 km/h 30 km/h 40 km/h 65 km/h	3 750 2 675 2 500 2 085	4 200 3 000 2 800 2 360	4 250 4 200 4 690 3 345 3 125 2 630	4 760 4 200 5 180 3 690 3 450 2 900	5 590 4 935 5 520 3 930 3 675 3 090	6 125 5 405 5 910 4 210 3 940 3 300	6 380 5 630 5 910	6 695 5 910	6 855 6 050	7 010 6 190						
	750/65 R26 166A8/166B TL MEGAXBIB (28 LR26)	356328	727	1621	725	4811	DW25B (A)	833	677		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	5 010 4 600 3 860 3 720 3 480 3 480	5 480 5 000 4 145 3 995 3 735 3 735	5 950 5 400 4 435 4 275 3 995 3 995	6 420 5 800 4 720 4 550 4 250 4 250	7 125 6 385 5 155 4 970 4 645 4 645	7 835 6 975 5 590 5 390 5 040 5 040	8 305 7 365 5 880 5 670 5 300 5 300	8 775 7 755	9 010 7 950							
30	620/75 R30 168A8/168B TL MEGAXBIB (23,1 R30)	753673	604	1710	770	5083	DW20B (A) DW18L	737	558		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	4 660 4 130 3 360 3 240 3 030 3 030	4 945 4 475 3 665 3 535 3 305 3 305	5 235 4 825 3 965 3 825 3 575 3 575	5 520 5 170 4 635 4 120 3 850 3 850	6 065 5 610 4 635 4 470 4 180 4 180	6 610 6 050 5 000 4 820 4 505 4 505	6 975 6 345 5 480 5 055 4 725 4 725	7 340 6 640 5 605 5 290 5 055 4 945	7 520 6 785 5 725 5 405 5 160 5 160	7 700 6 930 5 725 5 520 5 380 5 380	8 065 7 225 5 970 5 755 5 600 5 600	8 430 7 520 6 210 5 990 5 600 5 600	8 795 7 815	9 155 8 105	9 520 8 400	
32	650/75 R32 172A8/172B TL MEGAXBIB (24,5 R32)	468227	657	1825	821	5423	DW21B (A) DW20B (A) DW23B (A)	831	697		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	4 900 4 500 3 630 3 500 3 280 3 280	5 440 4 980 4 035 3 890 3 640 3 640	5 980 5 460 4 435 4 280 4 000 4 000	6 520 5 940 4 840 4 670 4 360 4 360	7 090 6 420 5 245 5 060 4 725 4 725	7 665 6 895 5 645 5 445 5 090 5 090	8 045 7 215 5 915 5 705 5 330 5 330	8 425 7 535 6 185 5 965 5 570 5 570	8 615 7 695 6 320 6 095 5 695 5 695	8 805 7 855 6 450 6 220 5 815 5 815	9 185 8 175 6 450 6 480 6 060 6 060	9 565 8 495 6 720 6 740 6 300 6 300	9 950 8 810	10 330 9 130	10 710 9 450	
	800/65 R32 167A8/167B TL MEGAXBIB	211711	799	1840	808	5438	DW27B (A) DW25B (A) DH27B	831	894		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	5 750 5 250 4 340 4 180 3 910 3 910	6 530 5 900 4 910 4 730 4 425 4 425	7 315 6 550 5 480 5 280 4 935 4 935	8 095 7 205 6 050 5 830 5 450 5 450	9 270 8 180											

<sup>(1)</sup> The reference rim is shown in bold type.<sup>(2)</sup> KLEBER tube code.IMPORTANT: the inflation pressure must always be appropriate  
for the load per tyre, the speed of travel and the work to be done.

10 Cyc - 30 Cyc: harvesting work with cyclic loads at 10 km/h - 30 km/h.

10: use at low torque up to 10 km/h.

25: use on the road up to a maximum speed of 25 km/h.

30: use in the field at higher torque and on the road up to maximum speed of 30 km/h.

40: use on the road up to a maximum speed of 40 km/h.

65: use on the road up to a maximum speed of 65 km/h.

<sup>(3)</sup> For ploughing and other applications subject to high torque use the 30 km/h.<sup>(4)</sup> for further information, refer to the "Rims and valves" section on page 128

# Characteristics of MICHELIN tyres for harvesting machinery

## MICHELIN MEGAXBIB



Ø  inches	Description	CAI	Tyre characteristics				Rim widths <sup>(1)</sup>  inches	Tube <sup>(2)</sup>	75% internal volume  litres		Pressure (bar) and (psi) – Load per tyre in kg <sup>(3)</sup>																	
			S mm	D mm	R' mm	R.C. mm					Bar Psi	1.00 15	1.20 17	1.40 20	1.60 23	1.90 28	2.20 32	2.40 35	2.60 38	2.70 39	2.80 41	3.00 44	3.20 46	3.40 49	3.60 52	3.80 55		
32	800/65 R32 172A8/172B TL MEGAXBIB	899063	801	1840	822	5459	DW27B (A) DW25B (A) DH27B	831	903		10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h	5 750 5 250 4 340 4 180 3 910 3 910	6 535 6 015 4 910 4 730 4 425 4 425	7 315 6 775 5 480 5 280 4 935 4 935	8 100 8 060 6 050 5 830 5 450 5 450	8 810 8 580 6 400 6 170 5 770 5 770	9 525 8 930 6 755 6 510 6 090 6 090	10 000 8 930 6 990 6 740 6 300 6 300	10 475 9 275 9 450	10 710								
	800/70 R32 181A8/181B TL MEGAXBIB	695992	793	1936	871	5725	DW27B (A) DW25B (A)		966		10 km/h Cyc 10 km/h 20 km/h 25 km/h 30 km/h 40 km/h	6 375 5 625 5 335 4 815 4 680 4 375	7 340 6 325 6 015 5 430 5 260 4 915	8 300 7 725 6 700 6 045 5 840 5 460	9 265 8 830 7 795 7 035 6 780 6 000	9 965 9 475 8 210 7 410 6 780 6 340	10 625 9 750 8 485 7 660 7 140 6 675	11 050 10 050 8 900 8 035 7 380 6 900	11 390 10 200 9 110 8 220 7 925 7 405	11 560 10 350 9 320 8 410 8 105 7 575	11 730 10 350 9 735 8 785 8 470 7 910	12 190 10 755 9 735 8 785 8 470 7 910	12 650 11 160 10 150 9 160 8 830 8 250	13 105 11 565 11 970	13 565 11 970	14 025 12 375		
	900/60 R32 176A8/176B TL MEGAXBIB	065407	863	1894	843	5614	DW27B (A) DW30B (A)	831	1031		10 km/h Cyc 10 km/h 20 km/h 25 km/h 30 km/h 40 km/h	6 860 6 240 5 305 5 100 4 920 4 600	7 475 6 760 5 795 5 495 5 305 4 955	8 085 7 280 6 285 5 895 5 685 5 315	8 700 7 795 6 775 6 290 6 070 5 670	9 620 8 575 7 510 6 885 6 645 6 205	10 540 9 355 8 245 7 485 7 215 6 745	11 150 9 870 8 735 7 880 7 600 7 100	11 765 10 390 9 650	12 070 10 650								
	1050/50 R32 178A8 TL M28 MEGAXBIB Tyre for harvesting machinery	236234	1038	1902	854	5649	36.00VA	Joint OR2052	1250		10 km/h Cyc 15 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h	7 420 5 350 6 860 5 570 5 370 5 020	8 225 6 235 7 570 6 195 5 970 5 580	9 035 7 120 8 280 6 815 6 570 6 140	9 840 8 000 8 990 7 440 7 170 6 700	10 635 9 330 9 605 7 775 7 490 7 000	11 425 10 390 10 225 8 110 7 815 7 300	11 955 11 010 10 635 8 330 8 030 7 500	12 485 11 320 11 045	12 750 11 475 11 250	11 630							
	1050/50 R32 178A8/172D TL MEGAXBIB T2 Tyre for spreading machinery	050072	1055	1858	824	5504	36.00VA	Joint OR2052	1250		10 km/h Cyc 30 km/h Cyc 10 km/h 30 km/h 40 km/h 65 km/h	  6 940 4 950 4 625 3 855	  7 730 5 510 5 150 4 375	7 865 6 940 8 590 6 125 5 725 4 840	8 755 7 730 9 450 6 740 6 900 5 300	10 220 9 020 10 350 7 385 6 900 5 825	11 390 10 050 10 950 7 815 7 300 6 150	12 070 10 650 10 950	12 410 10 950	12 580 11 100	12 750 11 250							
	1050/50 R32 184A8 TL MEGAXBIB T2 Tyre for spreading machinery	843450	1040	1856	831	5510	36.00VA	Joint OR2052	1250		10 km/h Cyc 30 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h	6 800 6 240 6 000 5 135 4 950 4 625	7 820 6 995 6 900 5 755 5 545 5 185	8 840 7 745 7 800 6 375 6 145 5 740	9 860 8 500 8 700 6 995 6 740 6 300	10 710 9 045 9 450 7 495 7 220 6 750	11 475 9 695 10 125 7 990 7 705 7 200	11 985 10 125 10 575 8 325 8 025 7 500	12 495 10 630 11 025 8 740 8 180 7 875	12 750 10 885 11 250 9 160 8 830 8 065	13 005 11 140 11 475 9 575 8 930 8 250	13 515 11 645 12 375 9 975 8 930 8 625	14 025 12 150 12 375 9 990 9 630 9000	14 450 12 600 12 750	14 875 13 050 13 125	15 300 13 500 13 500		

<sup>(1)</sup> The reference rim is shown in bold type.<sup>(2)</sup> KLEBER tube code.IMPORTANT: the inflation pressure must always be appropriate  
for the load per tyre, the speed of travel and the work to be done.

10 Cyc - 30 Cyc: harvesting work with cyclic loads at 10 km/h - 30 km/h.

10: use at low torque up to 10 km/h.

25: use on the road up to a maximum speed of 25 km/h.

30: use in the field at higher torque and on the road up to maximum speed of 30 km/h.

40: use on the road up to a maximum speed of 40 km/h.

65: use on the road up to a maximum speed of 65 km/h.

<sup>(3)</sup> For ploughing and other applications subject to high torque use the 30 km/h.<sup>(4)</sup> For further information, refer to the "Rims and valves" section on page 128

# Characteristics of MICHELIN tyres for harvesting machinery MICHELIN MEGAXBIB



Ø  inches	Description	CAI	Tyre characteristics				Rim widths <sup>(1)</sup>  inches	Tube <sup>(2)</sup>	75% internal volume  litres		Pressure (bar) and (psi) – Load per tyre in kg <sup>(3)</sup>																				
			S mm	D mm	R' mm	R.C. mm					Bar Psi	1.00 15	1.20 17	1.40 20	1.60 23	1.90 28	2.20 32	2.40 35	2.60 38	2.70 39	2.80 41	3.00 44	3.20 46	3.40 49	3.60 52	3.80 55					
34	620/75 R34 170A8/170B TL MEGAXBIB (23,1 R34)	325025	590	1814	821	5398	DW20B (A) DW18L	776	612		10 km/h Cyc	5 010	5 380	5 750	6 120	6 680	7 235	7 605	7 975	8 160	8 345	8 715	9 090	9 460	9 830	10 200					
											10 km/h	4 560	4 875	5 195	5 510	5 985	6 465	6 780	7 095	7 255	7 415	7 730	8 050	8 365	8 685	9 000					
											25 km/h	3 710	3 980	4 245	4 515	4 915	5 320	5 585	5 855	5 990	6 125	6 390	6 660								
											30 km/h	3 580	3 840	4 095	4 355	4 740	5 130	5 385	5 645	5 775	5 905	6 160	6 420								
											40 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000								
	710/75 R34 178A8/178B TL MEGAXBIB	543107	690	1900	848	5637	DW23B (A) MW23B (A) DW21B(A)	765	862		10 km/h Cyc	6 260	6 725	7 185	7 650	8 345	9 040	9 505	9 970	10 200	10 430	10 895	11 360	11 825	12 285	12 750					
											10 km/h	5 700	6 095	6 495	6 890	7 485	8 080	8 475	8 870	9 070	9 270	9 665	10 060	10 455	10 855	11 250					
											25 km/h	4 650	4 985	5 320	5 655	6 155	6 655	6 990	7 325	7 495	7 660	7 995	8 330								
											30 km/h	4 480	4 805	5 125	5 450	5 930	6 415	6 740	7 060	7 225	7 385	7 705	8 030								
											40 km/h	4 190	4 490	4 790	5 095	5 545	5 995	6 295	6 595	6 750	6 900	7 200	7 500								
											50 km/h	4 190	4 490	4 790	5 095	5 545	5 995	6 295	6 595	6 750	6 900	7 200	7 500								
38	620/70 R38 170A8/170B TL MEGAXBIB	476088	608	1864	850	5557	DW20B (A) DW18L	825	586		10 km/h Cyc	5 010	5 380	5 750	6 120	6 680	7 235	7 605	7 975	8 160	8 345	8 715	9 090	9 460	9 830	10 200					
											10 km/h	4 560	4 875	5 195	5 510	5 985	6 465	6 780	7 095	7 255	7 415	7 730	8 050	8 365	8 685	9 000					
											25 km/h	3 710	3 980	4 245	4 515	4 915	5 320	5 585	5 855	5 990	6 125	6 390	6 660								
											30 km/h	3 580	3 840	4 095	4 355	4 740	5 130	5 385	5 645	5 775	5 905	6 160	6 420								
											40 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000								
											50 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000								
42	520/85 R42 162A8/162B TL MEGAXBIB Only for use on combine harvesters with dual wheeled assemblies	504526	532	1951	900	5832	DW18L W18L DD18		544		10 km/h Cyc Dual	3 850	4 335	4 815	5 300	6 170	6 500	6 740	6 985	7 105											
											30 km/h Dual	2 825	3 180	3 530	3 885	4 150	4 355	4 475													
											10 km/h	3 990	4 595	5 205	5 810	6 395	6 830	7 070	7 265	7 360											
											25 km/h	3 330	3 745	4 165	4 580	4 890	5 135	5 275													
											30 km/h	3 210	3 610	4 015	4 415	4 715	4 950	5 085													
											50 km/h	3 000	3 375	3 750	4 125	4 405	4 625	4 750													
	620/70 R42 166A8/166B TL MEGAXBIB Only for use on combine harvesters with dual wheeled assemblies	100268	639	1969	888	5857	DW20B (A) DW18L MW20B (A)	802	657		10 km/h Cyc Dual	4 080	4 610	5 140	5 670	6 465	7 030	7 330	7 630	7 780	7 930										
											30 km/h Dual	3 060	3 455	3 845	4 240	4 520	4 800	4 990													
											10 km/h	4 090	4 620	5 155	5 685	6 485	7 050	7 350	7 650	7 800	7 950										
											40 km/h	3 250	3 665	4 085	4 500	4 800	5 100	5 300													
											50 km/h	3 250	3 665	4 085	4 500	4 800	5 100	5 300													

<sup>(1)</sup> The reference rim is shown in bold type.<sup>(2)</sup> KLEBER tube code.IMPORTANT: the inflation pressure must always be appropriate  
for the load per tyre, the speed of travel and the work to be done.

10 Cyc - 30 Cyc: harvesting work with cyclic loads at 10 km/h - 30 km/h.

10: use at low torque up to 10 km/h.

25: use on the road up to a maximum speed of 25 km/h.

30: use in the field at higher torque and on the road up to maximum speed of 30 km/h.

40: use on the road up to a maximum speed of 40 km/h.

65: use on the road up to a maximum speed of 65 km/h.

<sup>(3)</sup> For ploughing and other applications subject to high torque use the 30 km/h.<sup>(4)</sup> For further information, refer to the "Rims and valves" section on page 128