


High speed on the road



MICHELIN XM 47

Radial construction

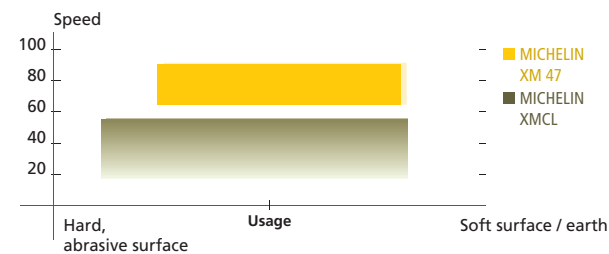

High speed tyre for tractors operating at up to 90 km/h on the road. Utility service vehicles needing both on and off road mobility

High speed (up to 90 km/h)*

- Radial construction → resistance to heat build-up

Good resistance to wear

- Wide, sturdy lugs
rounded shoulders → resistance to chunking

A high level of comfort on the road and good grip in off-road conditions

- Radial construction,
wide footprint
and low pressure → comfort and efficiency on soft or difficult ground

* Note: it is an offence to exceed the legal speed limit.

Sizes

405/70 R20 TL 136G
425/75 R20 TL 148G

445/70 R24 TL 151G
495/70 R24 TL 155G

Characteristics of Compact Line MPT radial tyres MICHELIN XM 47



Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres		Pressure (bar) and (psi) – Load per tyre in kg ⁽³⁾ - (4) - (5)																
			S mm	D mm	R' mm	R.C. mm					Bar Psi	1.00 15	1.20 17	1.60 23	1.80 26	2.00 29	2.20 32	2.40 35	2.60 38	2.80 41	3.00 44	3.20 46	3.40 49	3.60 52	3.80 55	4.10 59	
20	405/70 R20 136G TL XM47	123708	397	1082	490	3232	11 W10 11SDC	664	137		Stat	1 950	2 185	2 655	2 890	3 125	3 365	3 600	3 835	4 070	4 305	4 540	4 775	5 010	5 245	5 600	
	10 km/h										1 400	1 570	1 910	2 080	2 250	2 420	2 590	2 755	2 925	3 095	3 265	3 435	3 605	3 775	4 030		
	30 km/h										970	1 090	1 325	1 440	1 560	1 680	1 795	1 915	2 035	2 150	2 270	2 385	2 505	2 625	2 800		
	40 km/h										900	1 010	1 225	1 335	1 440	1 550	1 660	1 765	1 875	1 985	2 090	2 200	2 310	2 415	2 580		
	65 km/h										850	950	1 155	1 260	1 360	1 460	1 565	1 665	1 765	1 870	1 970	2 075	2 175	2 275	2 430		
	90 km/h		780	875	1 065	1 155	1 250	1 345	1 440	1 535	1 630	1 720	1 815	1 910	2 005	2 100	2 240										
	425/75 R20 148G TL XM47	123706	440	1152	513	3431	13 11 11SDC 13SDC	829	185		Stat	2 750	3 080	3 740	4 075	4 405	4 735	5 065	5 395	5 725	6 055	6 385	6 720	7 050	7 380	7 875	
	10 km/h										1 970	2 210	2 685	2 925	3 165	3 400	3 640	3 880	4 120	4 355	4 595	4 835	5 075	5 310	5 670		
	30 km/h										1 370	1 535	1 865	2 035	2 200	2 365	2 530	2 695	2 860	3 030	3 195	3 360	3 525	3 690	3 940		
	40 km/h										1 260	1 410	1 715	1 870	2 020	2 175	2 325	2 480	2 630	2 785	2 935	3 085	3 240	3 390	3 620		
	65 km/h										1 190	1 335	1 620	1 765	1 910	2 055	2 195	2 340	2 485	2 630	2 775	2 915	3 060	3 205	3 420		
	90 km/h		1 100	1 230	1 495	1 630	1 760	1 895	2 025	2 160	2 290	2 425	2 555	2 685	2 820	2 950	3 150										
24	445/70 R24 151G TL XM47	123642	460	1242	564	3705	DW15L W14L DW14L W15L	710	210		Stat	3 000	3 365	4 090	4 450	4 815	5 175	5 540	5 905	6 265	6 630	6 990	7 355	7 720	8 080	8 625	
	10 km/h										2 160	2 420	2 945	3 205	3 465	3 730	3 990	4 250	4 510	4 775	5 035	5 295	5 555	5 820	6 210		
	30 km/h										1 500	1 680	2 045	2 225	2 405	2 590	2 770	2 950	3 130	3 315	3 495	3 675	3 855	4 040	4 310		
	40 km/h										1 380	1 545	1 880	2 050	2 215	2 385	2 550	2 715	2 885	3 050	3 220	3 385	3 550	3 720	3 970		
	65 km/h										1 300	1 455	1 770	1 930	2 085	2 245	2 400	2 560	2 715	2 875	3 030	3 190	3 345	3 505	3 740		
	90 km/h		1 200	1 345	1 635	1 780	1 925	2 070	2 215	2 360	2 505	2 650	2 795	2 940	3 085	3 230	3 450										
	495/70 R24 155G TL XM47 XM47	123620	506	1313	587	3916	DW16L W16L	710	247		Stat	3 375	3 785	4 600	5 005	5 415	5 825	6 230	6 640	7 050	7 455	7 865	8 270	8 680	9 090	9 700	
	10 km/h										2 430	2 725	3 310	3 605	3 900	4 190	4 485	4 780	5 070	5 365	5 660	5 955	6 245	6 540	6 980		
	30 km/h										1 690	1 895	2 300	2 505	2 705	2 910	3 115	3 315	3 520	3 720	3 925	4 130	4 330	4 535	4 840		
	40 km/h										1 550	1 740	2 115	2 300	2 490	2 675	2 865	3 050	3 240	3 425	3 615	3 805	3 990	4 180	4 460		
	65 km/h										1 460	1 635	1 990	2 165	2 345	2 520	2 695	2 875	3 050	3 230	3 405	3 580	3 760	3 935	4 200		
	90 km/h		1 350	1 515	1 840	2 005	2 165	2 330	2 495	2 655	2 820	2 980	3 145	3 310	3 470	3 635	3 880										

⁽¹⁾ : The reference rim is shown in bold type.⁽²⁾ : KLEBER tube code.IMPORTANT: the inflation pressure must always be appropriate
for the load per tyre, the speed of travel and the work to be done.

Stat: Static load at 0 km/h, stationary vehicle.

10: maximum speed 10 km/h without high and sustained torque

30: Use in fields at higher torque and travel on the road at up to 30 km/h.

40: use on the road up to a maximum speed of 40 km/h.

65: use on the road up to a maximum speed of 65 km/h.

90: use on the road up to a maximum speed of 90 km/h.